

SEE IT. SEND IT.



WWW.ELEMENT-OPTICS.COM

ELEMENT
OPTICS

CATALOG 2026



CREATED BY SHOOTERS, FOR SHOOTERS

Element Optics designs and manufactures premium quality riflescopes, electro-optics and shooting accessories. Decades of personal experience through hunting, sports shooting and military service have provided our team with unique insights into what the modern sport of shooting requires, and we endeavour to provide the best products available across a variety of price tiers. Our policy of rolling development enables continuous improvement of existing product lines, while we push to introduce new technology to match cutting edge design with tried-and-tested production standards.

INDEX:

HELIX	P3-4
HELIX HD.....	P5-6
IRIS.....	P7-8
TITAN.....	P9-10
NEXUS.....	P11-12
THEOS.....	P13-14
IMMERSIVE.....	P15-16
HYPR-7.....	P17-18
RANGEFINDERS.....	P19-20
SEEKER.....	P21-22
BINOCULARS.....	P23-24
MOUNTS.....	P25-26
ACCESSORIES.....	P27-28
WARRANTY.....	P30
CONTACT.....	P31

HELIX

The HELIX GEN 2 continues the legacy of our original HELIX line of riflescopes, with industry-leading reliability and performance taken to the next level with new features and further design improvements.

The important things come first: Reliable tracking, intelligent reticles, innovative features and a user-friendly turret system. The turret system is tool-free and now features 8 MRAD or 20 MOA per revolution. The zero-stop mechanism ensures you never lose track of where you are, and the First Focal Plane reticle ensures precise reticle calibration at all magnifications. Optically, the familiar 4x erector system is complemented by a new design allowing for a larger field of view and a more forgiving eye-box. Whether you're a recreational shooter or a seasoned marksman, the Helix combines professional grade performance with a price point that makes high-quality optics accessible to everyone.

HELIX
6-24X50
FFP



HELIX GENII 4-16X44 FFP

MAGNIFICATION RANGE :	4-16	FIELD OF VIEW:	@100yds: 30.1-7.5ft	@100m: 10.1-2.5m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/4MOA (20MOA/REV)	1/10MRAD (8MRAD/REV)
OBJECTIVE LENS DIAMETER :	44mm	ELEVATION ADJUSTMENT RANGE :	90 MOA	26.1 MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	45 MOA	13 MRAD
LENGTH :	350mm	MINIMUM PARALLAX :	15 YDS	15 METERS
WEIGHT :	808g	EYE RELIEF :	4"	101mm



HELIX GENII 6-24X50 SFP

MAGNIFICATION RANGE :	6-24	FIELD OF VIEW:	@100yds: 20.1-5.0ft	@100m: 6.7-1.68m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/4MOA (20MOA/REV)	1/10MRAD (8MRAD/REV)
OBJECTIVE LENS DIAMETER :	50mm	ELEVATION ADJUSTMENT RANGE :	65 MOA	18.9 MRAD
RETICLE POSITION :	SFP	WINDAGE ADJUSTMENT RANGE :	40 MOA	11.6 MRAD
LENGTH :	356mm	MINIMUM PARALLAX :	10 YDS	10 METERS
WEIGHT :	830g	EYE RELIEF :	3.7"-4"	94-101mm



HELIX GENII 6-24X50 FFP

MAGNIFICATION RANGE :	6-24	FIELD OF VIEW:	@100yds: 20.1-5.0ft	@100m: 6.7-1.68m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/4MOA (20MOA/REV)	1/10MRAD (8MRAD/REV)
OBJECTIVE LENS DIAMETER :	50mm	ELEVATION ADJUSTMENT RANGE :	65 MOA	18.9 MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	40 MOA	11.6 MRAD
LENGTH :	356mm	MINIMUM PARALLAX :	10 YDS	10 METERS
WEIGHT :	830g	EYE RELIEF :	3.7"-4"	94-101mm



FIRST FOCAL PLANE



30MM BODY TUBE



SIDE PARALLAX



ADVANCED FULLY MULTI-COATED LENSES



TOOL FREE RESETTABLE



ZERO STOP



SECOND FOCAL PLANE



SHOCKPROOF



FEATHERWEIGHT DESIGN



WEATHER RESISTANT



LIFETIME WARRANTY

HELIX HD

The HD (High Definition) and HDLR (High Definition Long Range) models take the HELIX family to the next level with an extended zoom range and an improved optical system.

Optimized for the needs of hunters, these models feature Illuminated Second Focal Plane Reticles. The HD models keep both Elevation & Windage turrets capped for a sleek, compact look, while the HDLR makes use of an exposed Elevation turret with a zero stop mechanism. Reticle options range from the ultra-simple L4A, to the intelligently-designed RAPTR-1 BDC Reticle, to the tried-and-tested MRAD/MOA-based APR reticles. Whether you are stalking in the woods or preparing for a long shot across a canyon, the Helix HD range has something for everyone.



SFP
SECOND FOCAL PLANE



30MM
BODY TUBE



SIDE
PARALLAX



CAPPED
RESETTING
TURRETS



TOOL FREE
RESETTING



ZERO STOP



HD OPTICAL
SYSTEM



SHOCKPROOF



FEATHERWEIGHT
DESIGN



WEATHER
RESISTANT



LIFETIME
WARRANTY



HELIX HD 1-8X24

MAGNIFICATION RANGE :	1-8x	FIELD OF VIEW:	@100m:41-5.13m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/10 MRAD (6 MRAD / REV)
OBJECTIVE LENS DIAMETER :	24mm	ELEVATION ADJUSTMENT RANGE :	40MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	40 MRAD
LENGTH :	284mm	MINIMUM PARALLAX :	FIXED 100 METERS
WEIGHT :	519g	EYE RELIEF :	95mm (3.74")




HELIX HD COMPACT 2-12X42

MAGNIFICATION RANGE :	4-16	FIELD OF VIEW:	@100yds: 26.2-6.55ft	@100m:8.8-2.2m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/4MOA (15MOA/REV)	1/10MRAD (6MRAD/REV)
OBJECTIVE LENS DIAMETER :	42mm	ELEVATION ADJUSTMENT RANGE :	80MOA	23.3MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	45MOA	13.1 MRAD
LENGTH :	360mm	MINIMUM PARALLAX :	15YDS	15 METERS
WEIGHT :	675g	EYE RELIEF :	3.8"	97mm



HELIX HD 2-16X50

MAGNIFICATION RANGE :	2-16	FIELD OF VIEW:	@100yds: 60.4-7.5ft	@100m:20.2-2.51m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/4MOA (15MOA/REV)	1/10MRAD (6MRAD/REV)
OBJECTIVE LENS DIAMETER :	50mm	ELEVATION ADJUSTMENT RANGE :	100 MOA	29 MRAD
RETICLE POSITION :	SFP	WINDAGE ADJUSTMENT RANGE :	45 MOA	13 MRAD
LENGTH :	340mm	MINIMUM PARALLAX :	10 YDS	10 METERS
WEIGHT :	728g	EYE RELIEF :	4"	101mm

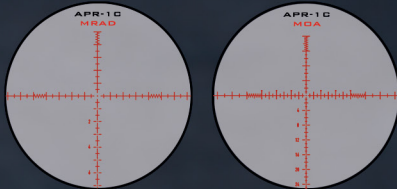

HELIX HDLR 2-16X50

MAGNIFICATION RANGE :	2-16	FIELD OF VIEW:	@100yds: 60.4-7.5ft	@100m:20.2-2.51m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/4MOA (15MOA/REV)	1/10MRAD (6MRAD/REV)
OBJECTIVE LENS DIAMETER :	50mm	ELEVATION ADJUSTMENT RANGE :	100 MOA	29 MRAD
RETICLE POSITION :	SFP	WINDAGE ADJUSTMENT RANGE :	45 MOA	13 MRAD
LENGTH :	340mm	MINIMUM PARALLAX :	10 YDS	10 METERS
WEIGHT :	770g	EYE RELIEF :	4"	101mm


IRIS

It doesn't get more classic than this! The IRIS family of riflescopes gives you everything you need in a hunting optic, providing a crystal clear image in a lightweight & compact package. The 1" body tube and 30/40mm objective allow for low-profile mounting on classic hunting rifles, with the 3-9 & 4-12 zoom ranges proving over many decades to be a great choice for hunting at close to intermediate ranges. Capped turrets keep critical components sealed and shielded, and all components are built and assembled to take a beating under harsh conditions and heavy recoil.



IRIS 3-9x40 SFP

MAGNIFICATION RANGE :	3-9	FIELD OF VIEW :	@100m: 6.8-10.5m	@100yds: 34.6-11.6ft
TUBE DIAMETER :	1 INCH	CLICK VALUE :	1/10MRAD (3.5MRAD/REV)	1/4MOA (12MOA/REV)
OBJECTIVE LENS DIAMETER :	40mm	ELEVATION ADJUSTMENT RANGE :	23.3 MRAD	80 MOA
RETICLE POSITION :	SFP	WINDAGE ADJUSTMENT RANGE :	23.3 MRAD	80 MOA
LENGTH :	308mm	MINIMUM PARALLAX :	FIXED 91 METERS	FIXED 100 YDS
WEIGHT :	416g	EYE RELIEF :	101.6mm	4"



IRIS 4-12x44 SFP

MAGNIFICATION RANGE :	4-12	FIELD OF VIEW :	@100m: 7.9-2.6m	@100yds: 26-8.6ft
TUBE DIAMETER :	1 INCH	CLICK VALUE :	1/10MRAD (3.5MRAD/REV)	1/4MOA (12MOA/REV)
OBJECTIVE LENS DIAMETER :	44mm	ELEVATION ADJUSTMENT RANGE :	18.9 MRAD	65 MOA
RETICLE POSITION :	SFP	WINDAGE ADJUSTMENT RANGE :	18.9 MRAD	65 MOA
LENGTH :	377mm	MINIMUM PARALLAX :	FIXED 91 METERS	FIXED 100 YDS
WEIGHT :	456g	EYE RELIEF :	101.6mm	4"



SECOND FOCAL PLANE



CAPPED RESETTABLE TURRETS



1 INCH BODY TUBE



ADVANCED FULLY MULTI-COATED LENSES



TOOL FREE RESETTABLE



FEATHERWEIGHT DESIGN



SHOCKPROOF



WEATHER RESISTANT



LIFETIME WARRANTY

TITAN

The TITAN is built for long-range enthusiasts, competitive marksmen, and those who want to push the limits. The robust 34mm tube construction ensures maximum resistance to hard knocks while providing the physical space required for an extended travel range. Large exposed turrets enable tactile, repeatable adjustments, while the tool-free mechanism with integrated zero-stop provides simple solutions when zeroing or dealing multiple revolutions.

Featuring high-density glass with lanthanide elements, the Titan delivers exceptional image clarity, vibrant color fidelity, and minimal chromatic aberration, even at the highest magnifications. Whether you are dialing in for extended distances or taking on rugged field conditions, the Titan is engineered to excel in every scenario.




TITAN 3-18X50 FFP

MAGNIFICATION RANGE :	3-18	FIELD OF VIEW:	@100yds: 41-6.8ft	@100m: 13.75-2.28m
TUBE DIAMETER :	34mm	CLICK VALUE :	1/4MOA (25MOA/REV)	1/10MRAD (10MRAD/REV)
OBJECTIVE LENS DIAMETER :	50mm	ELEVATION ADJUSTMENT RANGE :	150 MOA	43.6 MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	50 MOA	14.5 MRAD
LENGTH :	370mm	MINIMUM PARALLAX :	10 YDS	10 METERS
WEIGHT :	976g	EYE RELIEF :	4"	102mm



TITAN 5-25X56 FFP

MAGNIFICATION RANGE :	5-25	FIELD OF VIEW:	@100yds: 24.1-4.9ft	@100m: 8.1-1.6m
TUBE DIAMETER :	34mm	CLICK VALUE :	1/4MOA (25MOA/REV)	1/10MRAD (10MRAD/REV)
OBJECTIVE LENS DIAMETER :	56mm	ELEVATION ADJUSTMENT RANGE :	90 MOA	26.1 MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	50 MOA	14.5 MRAD
LENGTH :	385mm	MINIMUM PARALLAX :	15 YDS	15 METERS
WEIGHT :	1105g	EYE RELIEF :	3.74"-3.54"	95mm-89mm

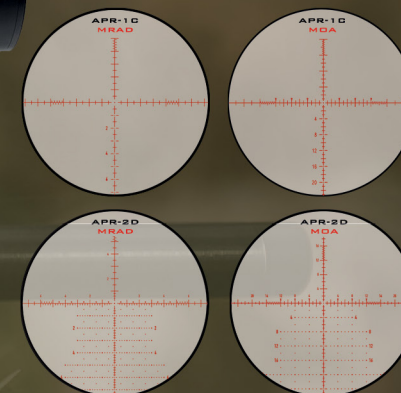

FIRST FOCAL PLANE



ILLUMINATED RETICLE



SIDE PARALLAX



ADVANCED FULLY MULTI-COATED LENSES



TOOL FREE RESETTABLE



ZERO STOP



HD OPTICAL SYSTEM



SHOCKPROOF



34MM BODY TUBE



WEATHER RESISTANT



LIFETIME WARRANTY

NEXUS


The word “NEXUS” means “focal point”, and that is what this model is to our riflescope range. The Nexus Gen 2 combines our flagship RevTrak Turrets with an advanced, lightweight optical system to create the ultimate 30mm riflescope. A variety of different illuminated APR reticle designs in both MOA and MRAD cater to the needs all shooters, making this a true crossover riflescope.

We've held nothing back, selecting only the very best materials, engineering teams, assembly procedures and technical inspections – and you'll realise that the moment you pick it up. Need something that ticks all the boxes? Look no further than the NEXUS.



NEXUS GENII 4-25X50 FFP

MAGNIFICATION RANGE :	4-25	FIELD OF VIEW:	@100yds: 29.2-4.7ft	@100m: 9.7-1.6m
TUBE DIAMETER :	30mm	CLICK VALUE :	1/4MOA (20MOA/REV)	1/10MRAD (10MRAD/REV)
OBJECTIVE LENS DIAMETER :	50mm	ELEVATION ADJUSTMENT RANGE :	100 MOA	29 MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	40 MOA	11.6 MRAD
LENGTH :	385mm	MINIMUM PARALLAX :	10 YDS	10 METERS
WEIGHT :	870g	EYE RELIEF :	3.0"-3.6"	77-92mm

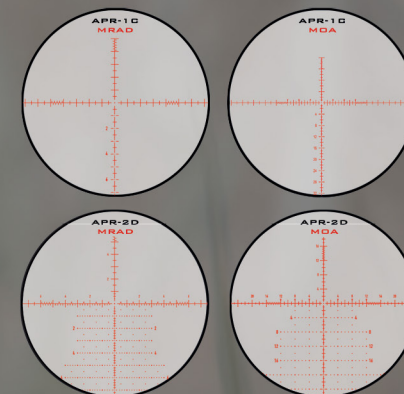

FIRST FOCAL PLANE



ILLUMINATED RETICLE



SIDE PARALLAX



ADVANCED FULLY MULTI-COATED LENSES



TOOL FREE RESETTABLE



REVOLUTION INDICATOR



ZERO STOP



SHOCKPROOF



30MM BODY TUBE



WEATHER RESISTANT



LIFETIME WARRANTY

THEOS

The THEOS is Element Optics' flagship family of riflescopes, crafted to perform at the highest level with no compromises.

At the heart of the Theos is premium ED glass, delivering unmatched clarity, high contrast, and a vibrant, razor-sharp image. Built with a robust 34mm tube, Theos riflescopes are designed to withstand the harshest conditions while providing reliable and repeatable tracking performance at extended ranges. The RevTrak turret system offers integrated revolution indicator and zero-stop mechanisms that require no tools to reset, with the large diameter allowing 12 MRAD per turn without sacrificing our optimized click spacing.

The Illuminated First Focal Plane reticle options are catered to each model, with the 2-10 featuring state-of-the-art Diffractive Grating technology to allow for true daylight illumination brightness without sacrificing on sharpness.


If elite performance without compromise is what matters to you, the Theos ticks all the boxes.



THEOS 6-36X56 FFP

MAGNIFICATION RANGE :	6-36	FIELD OF VIEW :	@100m: 6.8-1.1m	@100yds: 20.3-3.4ft
TUBE DIAMETER :	34mm	CLICK VALUE :	1/10MRAD (12MRAD/REV)	1/4MOA (30MOA/REV)
OBJECTIVE LENS DIAMETER :	56mm	ELEVATION ADJUSTMENT RANGE :	29 MRAD	100 MOA
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	11.6 MRAD	40 MOA
LENGTH :	377mm	MINIMUM PARALLAX :	10 METERS	10 YDS
WEIGHT :	1035g	EYE RELIEF :	74-89mm	2.9"-3.5"

AVAILABLE COLORS : BLACK / GREY

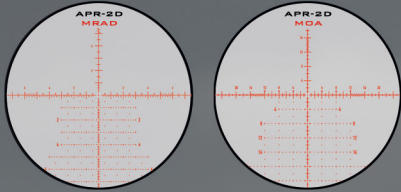

THEOS 2-10X42 FFP

MAGNIFICATION RANGE :	2-10	FIELD OF VIEW :	@100m: 19-3.8m
TUBE DIAMETER :	34mm	CLICK VALUE :	1/10MRAD (12MRAD/REV)
OBJECTIVE LENS DIAMETER :	42mm	ELEVATION ADJUSTMENT RANGE :	43 MRAD
RETICLE POSITION :	FFP	WINDAGE ADJUSTMENT RANGE :	29 MRAD
LENGTH :	290mm	MINIMUM PARALLAX :	10 METERS
WEIGHT :	819g	EYE RELIEF :	83-97mm


AVAILABLE COLORS : BLACK / FDE



FIRST FOCAL PLANE



ILLUMINATED RETICLE



SIDE PARALLAX



ADVANCED FULLY MULTI-COATED LENSES



TOOL FREE RESETTABLE



REVTRAK TURRETS



ZERO STOP



SHOCKPROOF



30MM BODY TUBE



WEATHER RESISTANT



LIFETIME WARRANTY

HYPR-7


The HYPR-7 digital riflescope from Element Optics is a revolutionary blend of cutting-edge technology and advanced optics, designed to redefine precision shooting. Packed with state-of-the-art features, the HYPR-7 offers an unparalleled level of adaptability, accuracy, and integration, making it the ultimate tool for modern marksmen.

At the heart of the HYPR-7 is Element Optics' proprietary Ballistic Chip, working seamlessly with built-in environmental condition sensors to automatically adjust for variables such as temperature, humidity, and air pressure. Paired with the Element Ballistics App for your smartphone, the HYPR-7 enables real-time data synchronization, providing instant ballistic calculations and adjustments to maximize your accuracy in the field or on the range. The HYPR-7's digital reticle system allows you to switch between multiple reticle designs, customizing your view for any scenario or personal preference. The integrated incline indicator ensures precise angle compensation, even in steep or uneven terrain. With its high-resolution display, intuitive controls, and rugged build, the HYPR-7 delivers a crystal-clear sight picture and reliable performance, no matter the conditions.



HYPR-7

MAGNIFICATION RANGE :	5X	FIELD OF VIEW:	@100yds: 33 ft	@100m:10.2 m
TUBE DIAMETER :	34mm	CLICK VALUE :	1/4MOA (15MOA/REV)	1/10MRAD (6MRAD/REV)
OBJECTIVE LENS DIAMETER :	30mm	ELEVATION ADJUSTMENT RANGE :	83 MOA	28 MRAD
EXIT PUPIL :	13.5-3.3mm	WINDAGE ADJUSTMENT RANGE :	83 MOA	28 MRAD
LENGTH :	147mm	MINIMUM PARALLAX :	6 YDS	6 METERS
WEIGHT :	486g	EYE RELIEF :	3.35"	85mm

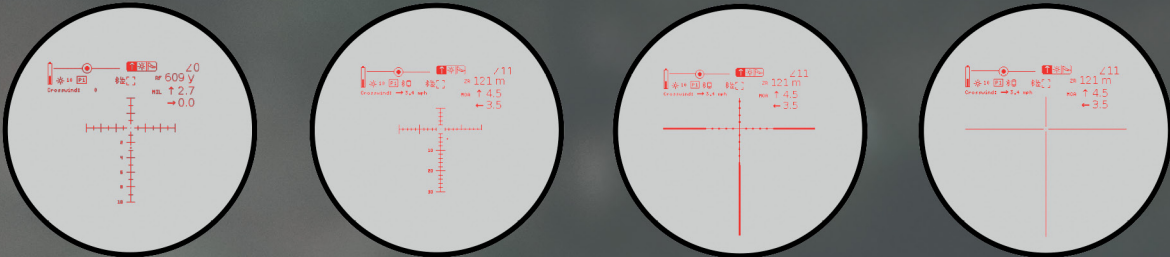

BATTERY MONITOR

BRIGHTNESS, PROFILE, CONNECTED DEVICE

CROSSWIND

CANT INDICATOR

RANGEFINDER CONNECTED

INPUT MODE: ELEVATION, BRIGHTNESS, WINDAGE

INCLINE & RANGE

ELEVATION & WINDAGE

CHOOSE YOUR RETICLE

PREDICTED POI

ED OPTICS LARGE FOV

IMMERSIVE SERIES


The Immersive Series from Element Optics redefines what a compact riflescope can offer. Designed for lightweight setups and close to medium-range precision, the Immersive Series prioritizes field of view, clarity, and versatility in a sleek and compact package.

What sets the Immersive Series apart is its ultra-wide field of view, offering unparalleled situational awareness and a truly “immersive” sight picture that allows you to stay connected to your surroundings while keeping your target in sharp focus. The lightweight design pairs perfectly with smaller, maneuverable rifles, ensuring balance and ease of handling. Step into the next era of compact optics with the Immersive Series—where precision meets practicality.




IMMERSIVE 5X30

MAGNIFICATION RANGE :	5X	FIELD OF VIEW :	@100yds: 33 ft	@100m: 10.2 m
TUBE DIAMETER :	34mm	CLICK VALUE :	1/4MOA (15MOA/REV)	1/10MRAD (6MRAD/REV)
OBJECTIVE LENS DIAMETER :	30mm	ELEVATION ADJUSTMENT RANGE :	83 MOA	28 MRAD
EXIT PUPIL :	13.5-3.3mm	WINDAGE ADJUSTMENT RANGE :	83 MOA	28 MRAD
LENGTH :	147mm	MINIMUM PARALLAX :	6 YDS	6 METERS
WEIGHT :	486g	EYE RELIEF :	3.35"	85mm

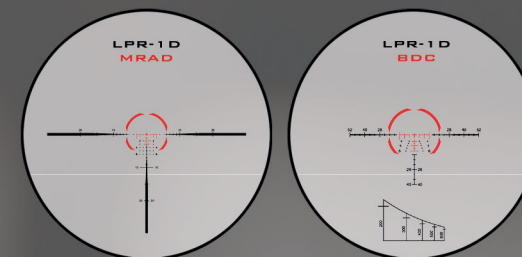


IMMERSIVE 10X40

MAGNIFICATION RANGE :	10X	FIELD OF VIEW :	@100yds: 34 ft	@100m: 11.4m
TUBE DIAMETER :	---	CLICK VALUE :	1/4MOA (15MOA/REV)	1/10MRAD (6MRAD/REV)
OBJECTIVE LENS DIAMETER :	40mm	ELEVATION ADJUSTMENT RANGE :	83 MOA	28 MRAD
EXIT PUPIL :	---	WINDAGE ADJUSTMENT RANGE :	83 MOA	28 MRAD
LENGTH :	135mm	MINIMUM PARALLAX :	6 YDS	6 METERS
WEIGHT :	485g	EYE RELIEF :	0.7"	18mm

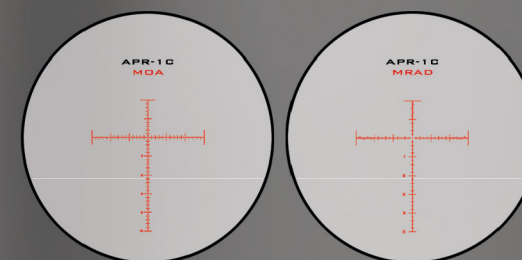

IMMERSIVE 14X50

MAGNIFICATION RANGE :	14X	FIELD OF VIEW :	@100yds: 28 ft	@100m: 9.6 m
TUBE DIAMETER :	---	CLICK VALUE :	1/4MOA (15MOA/REV)	1/10MRAD (6MRAD/REV)
OBJECTIVE LENS DIAMETER :	50mm	ELEVATION ADJUSTMENT RANGE :	83 MOA	28 MRAD
EXIT PUPIL :	---	WINDAGE ADJUSTMENT RANGE :	83 MOA	28 MRAD
LENGTH :	154mm	MINIMUM PARALLAX :	6 YDS	6 METERS
WEIGHT :	554g	EYE RELIEF :	0.7"	18mm

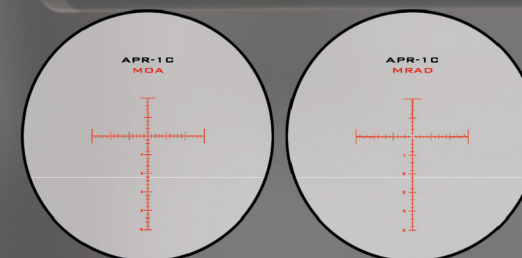

BALLISTIC RANGEFINDERS

Element Optics Rangefinders do far more than simply measuring target distances. Our propriety Element Ballistics Chip, integrated in every model, calculates advanced real-time firing solutions to ensure perfect shot placement every time.

Each rangefinder is capable of pairing with the Element Ballistics app for a user friendly interface where you can create ballistic profiles and access a large bullet database with custom drag models. Wind, atmospheric, incline angle, spin drift and aerodynamic jump are all accounted for the instant the range button is pressed, and the firing solution displayed in your unit of choice on a dual-color T-OLED display. It doesn't get easier than this!



HELIX 1500

The Helix 1500 is the perfect all-rounder, offering reliable performance and a range of up to 1500 meters, making it ideal for hunters and recreational shooters alike.



TITAN 3K

For those who demand more, the Titan 3K takes it to the next level with a stunning 3000 meters range and premium optics, ensuring unmatched clarity and accuracy for long-distance shooting.



RF MODULE

Looking for adaptability? The Rangefinding Module is the versatile choice, designed to integrate seamlessly with your existing optics, adding advanced rangefinding capabilities to your setup.



SEEKER

The Seeker is a Weapon Mounted Laser Rangefinder (WMLRF) with an integrated Ballistics Calculator. Using the full power of the Element Ballistics Chip, the Seeker measures atmospheric conditions using on-board sensors, and allows for wind data capture to provide instant, accurate firing solutions.

Unlike a handheld rangefinder, this unit connects to your weapon system, and can be “zeroed” to your riflescope. This eases your workflow and enables you to range and engage your target without changing position. With seamless app integration, storage for 4 profiles and a user-friendly interface, the Seeker is our solution for rapid target engagement out to 3000 Meters.



SEEKER

RANGE DISTANCE :	3000 METERS	BATTERY :	CR123	WEATHER RESISTANT :	IPX6
CONNECTIVITY :	Bluetooth, Cable Remote	BATTERY LIFE :	6000+ Rangings	HEIGHT ABOVE MOUNT :	41mm
SENSORS :	Barometer, Hygrometer, Inclinometer, Thermometer, Compass	DIMENSIONS :	L118 x W72 x H50mm		
		WEIGHT (W/BATTERY) :	318g / 11.2oz		



5-3000M
DISTANCE



BLUETOOTH
CONNECTIVITY



COMPASS



CR123
RECHARGEABLE
BATTERY



ELEMENT OPTICS
BALLISTIC CHIP



QUICK CONNECT
MOUNT



KESTREL
INTEGRATION



REMOTE
CONNECTOR



STRONG AND
RUGGED DESIGN



SMARTPHONE
APP



ONBOARD
WEATHER SENSORS



WEATHER
RESISTANT



LIFETIME
WARRANTY

HELIX HD BINOCULARS

The HELIX HD Binoculars from Element Optics deliver clarity and durability in an all-inclusive package, making them the perfect companion for hunters, outdoor enthusiasts, and shooters alike. Built with premium HD glass, these binoculars provide stunning image quality, enhanced light transmission, and exceptional edge-to-edge sharpness, ensuring you don't miss a single detail in the field.

Included in the package is a comfortable and durable chest pack, allowing you to carry your binoculars and additional accessories through challenging terrain without feeling obstructed. Whether you're glassing for game, scouting terrain, or observing distant details, the HELIX HD Binoculars offer the reliability and optical precision you need. Experience the perfect blend of portability, performance, and affordability with the HELIX HD Binoculars crafted for those who demand more from their optics.



HELIX HD 8X42

MAGNIFICATION RANGE :	8X	FIELD OF VIEW:	@1000yds: 425 ft	@1000m:142m
OBJECTIVE LENS DIAMETER :	42mm	EYE RELIEF :	0.67"	17.2mm
PRISM TYPE :	BAK-4	LENGTH :	5.57"	141.7mm
EXIT PUPIL :	5.2mm	WEIGHT :	23.42oz	664g

CHASSIS MATERIAL : **MAGNESIUM**

HELIX HD 10X42

MAGNIFICATION RANGE :	10X	FIELD OF VIEW:	@1000yds: 341 ft	@1000m:114m
OBJECTIVE LENS DIAMETER :	42mm	EYE RELIEF :	0.6"	15.2mm
PRISM TYPE :	BAK-4	LENGTH :	5.57"	141.7mm
EXIT PUPIL :	4.3mm	WEIGHT :	22.9oz	649g

CHASSIS MATERIAL : **MAGNESIUM**

MOUNTS

When it comes to securing your optics, precision and durability are non-negotiable. The Element Optics Scope Mounts are designed to provide a rock-solid foundation for your riflescope, ensuring consistent accuracy and reliability in any shooting scenario. Built from high-grade materials and engineered for exceptional strength, these mounts deliver a perfect fit for your optic while minimizing weight, making them ideal for both hunting and competition setups.

For shooters who require additional flexibility, the Diving Board takes adaptability to the next level. Designed to pair seamlessly with Element Optics mounts, the Diving Board provides a stable platform for mounting accessories such as rangefinders, red dot sights, or other tactical gear. With its sleek, lightweight design and robust construction, the Diving Board ensures your accessories are always secure and perfectly aligned for quick and easy use.

Whether you're dialing in for long-range precision or outfitting your rifle for a dynamic shooting environment, the Element Optics Scope Mounts and Diving Board deliver the reliability, versatility, and performance you need to stay on target.



ACCU-LITE MOUNTS

30MM			
LOW	MEDIUM	HIGH	EXTRA HIGH
22mm (0.87")	25mm (0.98")	29mm (1.14")	35mm (1.38")
113g (4oz)	123g (4.3oz)	137g (4.8oz)	160g (5.6oz)

MATERIAL : 7075-T6 ALUMINUM & STAINLESS STEEL

34MM			
LOW	MEDIUM	HIGH	EXTRA HIGH
24mm (0.94")	27mm (1.06")	31mm (1.22")	37mm (1.46")
117g (4.1oz)	127g (4.5oz)	141g (5.0oz)	160g (5.6oz)

MOUNTS TO : PICATINNY WEAVER



XT MOUNTS

1" DOVETAIL		
LOW	MEDIUM	HIGH
22.7mm (0.9")	26.7mm (1.05")	31.7mm (1.25")
72.2g (2.55oz)	83.6g (2.95oz)	96.2g (3.39oz)

MATERIAL : 6061 ALUMINUM

30MM DOVETAIL	
MEDIUM	HIGH
27.2mm (1.07")	32.2mm (1.27")
82.8g (2.92oz)	96g (3.39oz)

30MM PICATINNY		
LOW	MEDIUM	HIGH
21.9mm (0.86")	25mm (0.98")	28.9mm (1.14")
86.2g (3.0oz)	98g (3.45oz)	110g (3.88oz)

MOUNTS TO : PICATINNY / DOVETAIL



ACCU-LITE DIVING BOARDS

AVAILABLE IN BOTH 30MM & 34MM
MATERIAL : 7075-T6 ALUMINUM

ACCESSORIES



NEOPRENE COVERS
NOW AVAILABLE FOR ALL MODELS

TENEBRAEX CAPS
FOR NEXUS & THEOS



SPARE PARTS




TURRET CAPS



ELEVATION TURRETS



WINDAGE TURRETS



ZERO STOPS



THROW LEVERS



SCREWS



SUNSHADES



FLIP CAPS



BIKINI COVERS

BUILT TO LAST A LIFETIME

As shooters, we know that there is nothing worse than being let down by your equipment. We have made every effort to build a rugged, reliable product that will not break under any normal circumstances, and have implemented some of the strictest quality control measures in the industry.

Riflescopes aren't ornaments – They are built to be used. We know this all too well, and our products are tested for extreme shock (1000x 1000 G's!), Submersion in water, and extreme temperature conditions. A strict set of collimator tests also ensure that the critical internal mechanisms perform to our control standards.

Every ELEMENT riflescope comes with a Quality Guarantee card, signed by an inspector before the product is placed in the box. We hope it gives you peace of mind to know that we pride ourselves in what we make and expect everything that leaves the factory to give you a lifetime of faithful service.

However, we know that things can go wrong, and therefore ALL ELEMENT Riflescopes are covered by our **PLATINUM LIFETIME WARRANTY**, with the exception of electronic components in our electro-optics products (HYPR-7 & Rangefinders), which are under a 3 year warranty.

If you have a problem, we will fix it – It's that easy!

For more information about our PLATINUM LIFETIME WARRANTY, visit
WWW.ELEMENT-OPTICS.COM/WARRANTY

CONTACT US

EMAIL

info@element-optics.com

SALES SUPPORT

sales@element-optics.com

FIND A DEALER

element-optics.com/dealers

INTERNATIONAL OFFICE

Västerängsvägen 10
542 35 Mariestad
Sweden

